TINTINA RESOURCES, INC. BLACK BUTTE COPPER PROJECT AMBIENT AIR MONITORING PROGRAM Quarterly Data Report First Quarter 2015

Prepared for:

Tintina Resources, Inc. 17 East Main St White Sulphur Springs, MT 59645

Prepared by:

Bison Engineering, Inc. 1111 Maggie Lane Billings, MT 59101 (406) 896-1716 http://www.bison-eng.com

CERTIFICATION OF DATA INTEGRITY

Bison Engineering, Inc., certifies the data in this report is an accurate summary of the air quality conditions measured at the Black Butte Copper Project air monitoring site. Every effort was made to obtain accurate and representative data and to comply with the procedures set forth in the project-specific Quality Assurance Project Plan, the State of Montana Ambient Air Monitoring Program Quality Assurance Project Plan (April 2013), and the Environmental Protection Agency's Quality Assurance Handbook for Air Pollution Measurement Systems: Volume I, A Field Guide to Environmental Quality Assurance (April 1994), Volume II, Ambient Air Quality Program (May 2013), and Volume IV, Meteorological Measurements (March 2008).

Preparer:	Jeffrey S. Bell
Signature:	JH S Bell
Title:	Senior Field Technician
Date:	4/14/15
Reviewer:	Rebecca L. Picchioni, P.E.
Signature:	Rebecca & Rietheri
Title:	Project Engineer
Date:	4/29/15

TABLE OF CONTENTS

CERTIFIC	ATION OF DATA INTEGRITY ii
1.0	INTRODUCTION1
2.0	MONITORING SYSTEM OPERATIONS
3.0	CALIBRATION DATA4
4.0	PERFORMANCE AUDIT DATA5
5.0	DATA COMPLETENESS6
6.0	MONITORING DATA11
LIST O	F TABLES
Table 1. Table 2. Table 3a. Table 3b. Table 4. Table 5. Table 6. Table 7. Table 8.	Monthly Data Completeness
LIST O	F FIGURES
Figure 1. Figure 2. Figure 3. Figure 4. Figure 5.	Monitoring Site Location
A TOTOTAL	DICEC

<u>APPENDICES</u>

Appendix A: Meteorological Data Appendix B: Performance Audit Reports


1.0 INTRODUCTION

Tintina Resources, Inc. established an ambient air monitoring site to measure wind speed, wind direction, standard deviation of wind direction, temperature at 9 meters and 2 meters, delta temperature, solar radiation, barometric pressure, and precipitation. The station was established to accurately characterize the local meteorology and collect baseline data in support of an operating permit application and various environmental studies.

The meteorological monitoring system was installed in April 2012. The site is operated by Bison Engineering, Inc., of Helena and Billings. Figure 1 shows the location of the monitoring site.

This report presents the data collected during the first quarter (January through March) of 2015. In addition, a description of the monitoring system operations is presented, together with summaries of quality assurance activities, including calibrations and performance audits. Tabular summaries of the data completeness achieved and the periods of missing data also are presented. Appendix A presents hourly meteorological data collected.

Figure 1. Monitoring Site Location

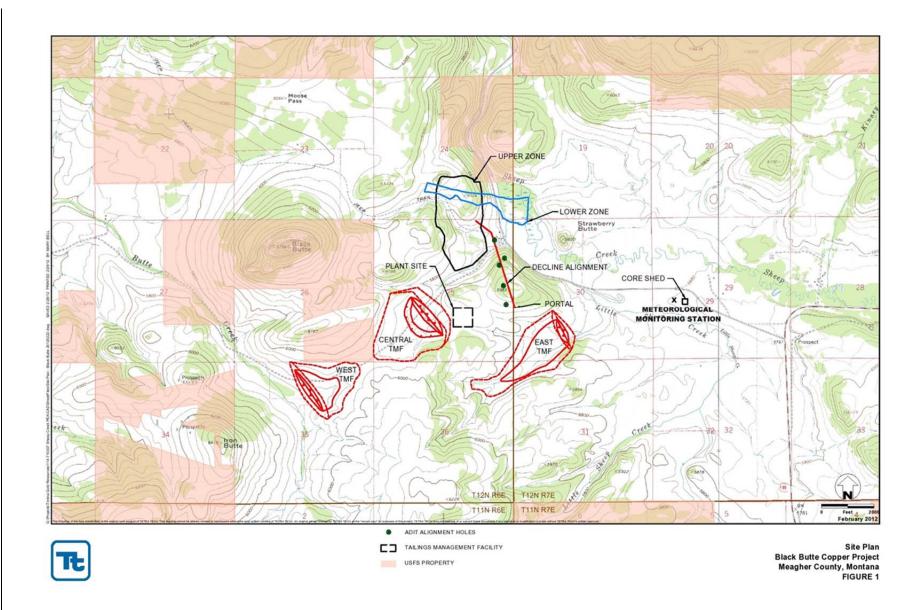

2.0 MONITORING SYSTEM OPERATIONS

The installation of the monitoring meteorological system equipment took place in April 2012, soon after the equipment was received from the manufacturers. The installation and calibration of the equipment required about two weeks to complete. All meteorological parameters were in full operation and producing valid data by April 30, 2012.

Steve Heck of Bison conducted performance audits of the meteorological system on March 11, 2015. All results were satisfactory. The Bison report of the audits is presented in Appendix B. The wind speed and wind direction sensors were replaced and calibrated after the audits were completed.

3.0 CALIBRATION DATA

As discussed in Section 4.0, the system's as-found condition was audited on March 11, 2015. Refurbished wind speed and wind direction sensors were installed and calibrated after the audits were completed, so that the existing units could be serviced (they were working properly when removed). No calibration adjustments were needed for any of the other meteorological instruments, based on the audit results.

4.0 PERFORMANCE AUDIT DATA

Steve Heck of Bison conducted performance audits of the meteorological system on March 11, 2015. All results were satisfactory. The Bison report of the audits is presented in Appendix B.

5.0 DATA COMPLETENESS

The meteorological percentages of data recovery achieved during the first quarter of 2015 are given in Tables 1 and 2. In these tables, the number of possible data values during each month of the quarter is given, together with the number of valid readings and the number of hours spent on quality assurance activities (such as calibrations, performance audits, and maintenance on the sensors). The quality assurance hours are added to the number of hours of valid data to compute the net percentage data recovery.

During the first quarter the net percentage data recovery was 94.4 percent for precipitation (discussed below), 99.5 percent for wind speed and 100.0 percent for all other parameters at the site. The loss of wind speed data was due to the sensor's cups being frozen in place because of weather. Those periods of missing data are summarized in Table 3a.

The precipitation gauge opening at the Tintina site is located approximately 18 inches above ground level, and the early part of the winter of 2014 – 2015 experienced heavy snowfall. The Tintina site representative was diligent about keeping the precipitation gauge and the area within its wind screen clear of snow, but the general snow depth at the Tintina site was sufficient to cause drifting at times during the latter half of January. This resulted in drifting of snow into the gauge, and false positive precipitation readings as the accumulated snow melted. The snowpack melted rapidly during February and March due to unusually mild weather, so drifting did not affect the precipitation readings in those months.

Table 3b lists the periods when drifting effects were suspected based on Bison's review of the meteorological data file. Those periods were assigned hourly values of 0.000 inches in Appendix A, since it is **probable** that the actual precipitation amount during those hours was zero. Because that cannot be known with certainty, those periods have been counted as missing data in Tables 1 and 2. This resulted in a net data recovery for precipitation of 83.6 percent for January and 94.4 percent for the guarter.

In general, false positive precipitation periods were suspected when:

- Non-zero precipitation readings were accompanied by low-to-moderate relative humidity readings (versus readings of 75-80% or higher that would typically occur during a precipitation event), and
- 2) Significant wind (indicating potential drifting) was present, generally 4-5 meters per second or higher.

Table 1. Monthly Data Completeness

January 2015														
Quality Net														
	Readings	Valid	Percentage	Assurance	Percentage									
Parameter	Possible	Readings	Recovery	Hours	Recovery									
	Black Bu	tte Copper	Project Met T	ower										
Wind Speed	744	744	100.0	0	100.0									
Wind Direction	744	744	100.0	0	100.0									
Standard Deviation	744	744	100.0	0	100.0									
Temperature 9	744	744	100.0	0	100.0									
Meters														
Temperature 2	744	744	100.0	0	100.0									
Meters														
Temperature Delta	744	744	100.0	0	100.0									
T														
Solar Radiation	744	744	100.0	0	100.0									
Barometric	744	744	100.0	0	100.0									
Pressure														
Relative Humidity	744	744	100.0	0	100.0									
Precipitation	744	622	83.6	0	83.6									
Total	7,440	7,318	98.4	0	98.4									

Table 1. Monthly Data Completeness (Continued)

		Februar	y 2015		
				Quality	Net
	Readings	Valid	Percentage	Assurance	Percentage
Parameter	Possible	Readings	Recovery	Hours	Recovery
	Black Bu	tte Copper	Project Met T	ower	
Wind Speed	672	672	100.0	0	100.0
Wind Direction	672	672	100.0	0	100.0
Standard Deviation	672	672	100.0	0	100.0
Temperature 9	672	672	100.0	0	100.0
Meters					
Temperature 2	672	672	100.0	0	100.0
Meters					
Temperature Delta	672	672	100.0	0	100.0
T					
Solar Radiation	672	672	100.0	0	100.0
Barometric	672	672	100.0	0	100.0
Pressure					
Relative Humidity	672	672	100.0	0	100.0
Precipitation	672	672	100.0	0	100.0
Total	6,720	6,720	100.0	0	100.0

Table 1. Monthly Data Completeness (Continued)

March 2015													
				Quality	Net								
	Readings	Valid	Percentage	Assurance	Percentage								
Parameter	Possible	Readings	Recovery	Hours	Recovery								
	Black Bu	tte Copper	Project Met T	ower									
Wind Speed	744	727	97.7	6	98.5								
Wind Direction	744	738	99.2	6	100.0								
Standard Deviation	744	738	99.2	6	100.0								
Temperature 9	744	738	99.2	6	100.0								
Meters													
Temperature 2	744	738	99.2	6	100.0								
Meters													
Temperature Delta	744	738	99.2	6	100.0								
T													
Solar Radiation	744	738	99.2	6	100.0								
Barometric	744	738	99.2	6	100.0								
Pressure													
Relative Humidity	744	738	99.2	6	100.0								
Precipitation	744	738	99.2	6	100.0								
Total	7,440	7,369	99.0	60	99.9								

 Table 2.
 Quarterly Data Completeness

		First Quar	ter 2015		
				Quality	Net
	Readings	Valid	Percentage	Assurance	Percentage
Parameter	Possible	Readings	Recovery	Hours	Recovery
	Black Bu	tte Copper	Project Met T	ower	
Wind Speed	2,160	2,143	99.2	6	99.5
Wind Direction	2,160	2,154	99.7	6	100.0
Standard Deviation	2,160	2,154	99.7	6	100.0
Temperature 9	2,160	2,154	99.7	6	100.0
Meters					
Temperature 2	2,160	2,154	99.7	6	100.0
Meters					
Temperature Delta	2,160	2,154	99.7	6	100.0
T					
Solar Radiation	2,160	2,154	99.7	6	100.0
Barometric	2,160	2,154	99.7	6	100.0
Pressure					
Relative Humidity	2,160	2,154	99.7	6	100.0
Precipitation	2,160	2,032	94.1	6	94.4
Total	21,600	21,407	99.1	60	99.4

Table 3a. Periods of Missing Data

		Firs	t Quarter 20	15		
Starting	Ending			Total	Percent	
Date/Hour	Date/Hour	Site	Parameter	Hours	of Month	Circumstance
Mar 23/21	Mar 24/7	Met Tower	Wind Speed	11	0.51	Missing data:
			_			Cups frozen in
						place.

Table 3b. Suspected False Non-Zero Precipitation Readings

	First Quarter 2015													
Start Date Start Hour End Date End Hour Hours														
January 2015														
Jan 16	13	Jan 18	6	42										
Jan 18	12	Jan 19	20	33										
Jan 24 11 Jan 26 3 41														
Jan 26	11	Jan 26	16	6										

6.0 MONITORING DATA

The hourly data values collected at the monitoring sites are given in the data tables in Appendix A. Each of these tables presents one month's data for all parameters in the monitoring system. In addition, the average, maximum, and minimum values for each parameter for each day are listed (for wind direction, the prevailing wind direction for the day is given). For those hours with missing data, a code is given that explains the reason the data were missing. These codes are given in Table 4.

Monthly and quarterly wind rose distributions from the monitoring site are presented in Tables 5 through 8. These tables give the percentage frequency of occurrence of winds from 16 cardinal directions and from 22 wind speed ranges. These same data are presented graphically in Figures 2 through 5. In the wind rose figures, the length of each "petal" of the rose is proportional to the percentage of time the wind blew from that direction. On the bottom of each figure is a histogram showing the average wind speed from each of the cardinal wind directions.

Table 4. Missing Data Codes

Mnemonic Code	Description	Equivalent EPA Null Value Reason Code
Sc	Scheduled but not collected	9972
Ti	Sample time out of limits	9973
Fi	Filter damage	9976
Ор	Voided by operator	9978
ND	Machine malfunction	9980
Wx	Bad weather	9981
Со	Collection error	9983
Lb	Lab error	9984
QA	Poor quality assurance results	9985
Pwr	Power failure	9988
Wi	Wildlife damage	9989
AZ	Automatic zero/span check	9991
ZS	Manual zero/span check	9986
Au	Performance audit	9992
Ма	Routine maintenance/repairs	9993
Ca	Multipoint calibration	9995
PZ	Precision/zero/span	9998

Table 5. Monthly Wind Rose Summary, Black Butte Copper Project Met Tower

								Janu	ary 2	015								
	Direction>>>	N	NNE	NE	ENE	Е	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	Total
	0.1 - 1.0	3.2	2.3	2.0	2.0	4.4	5.5	4.6	2.8	1.5	0.3	0.7	0.5	0.5	1.2	1.5	1.6	34.7
	1.1 - 2.0	0.7	1.7	2.8	2.6	4.0	4.2	3.0	1.5	8.0	0.4	0.4	0.4	0.8	1.6	1.6	0.5	27.0
	2.1 - 3.0	0.1	0.1	8.0	2.0	2.3	0.4	0.3	0.4	0.4	0.1	0.0	0.5	1.1	0.8	1.5	0.5	11.4
	3.1 - 4.0	0.1	0.1	0.0	0.1	8.0	0.3	0.0	0.1	0.4	0.0	0.0	0.3	0.9	2.4	1.3	0.0	7.0
	4.1 - 5.0	0.0	0.1	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.0	0.3	0.7	1.3	1.5	0.9	0.1	5.1
	5.1 - 6.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.4	0.3	0.1	0.0	0.0	1.9	1.5	0.0	0.0	4.2
्र च	6.1 - 7.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.4	0.0	0.0	0.0	0.1	2.0	1.6	0.5	0.1	4.8
second)	7.1 - 8.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.4	1.5	0.1	0.5	0.1	2.7
	8.1 - 9.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.5	0.4	0.3	0.0	1.2
per	9.1 - 10.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.7	0.3	0.0	0.0	1.1
ers	10.1 - 11.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.4	0.0	0.0	0.0	0.4
net	11.1 - 12.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	0.0	0.0	0.0	0.3
D	12.1 - 13.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
bee	13.1 - 14.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Wind Speed (meters	14.1 - 15.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.0	0.1
۸	15.1 - 16.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	16.1 - 17.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	17.1 - 18.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	18.1 - 19.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	19.1 - 20.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	> 20.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Calm																	0.0
	Total	4.2	4.4	5.6	6.7	11.6	10.3	7.8	5.8	3.4	0.9	1.3	3.1	12.0	11.6	8.2	3.1	100.0
A۱	erage Speed	0.9	1.2	1.4	1.6	1.5	1.1	1.0	1.9	1.8	2.1	1.6	3.7	5.6	4.2	3.2	1.9	2.4

4

Table 6. Monthly Wind Rose Summary, Black Butte Copper Project Met Tower

								Calam	0	045								
	1			1	1				uary 2		1	,			,	,	1	•
	Direction>>>	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	Total
	0.1 - 1.0	1.2	1.5	2.1	1.5	1.5	1.9	1.8	1.0	0.4	0.3	0.1	0.4	0.7	0.4	0.4	1.0	16.5
	1.1 - 2.0	0.4	1.8	2.8	3.1	3.7	3.1	2.4	0.9	0.1	0.0	0.3	0.6	1.9	1.8	2.4	0.4	25.9
	2.1 - 3.0	0.1	0.4	0.3	0.9	2.8	0.4	0.7	0.4	0.4	0.1	0.1	0.4	1.6	2.8	2.2	0.9	15.0
	3.1 - 4.0	0.6	0.0	0.0	0.1	0.9	0.3	0.0	0.4	0.3	0.0	0.0	0.6	2.4	3.0	1.9	0.4	11.0
	4.1 - 5.0	0.1	0.0	0.0	0.0	0.1	0.1	0.0	1.3	0.0	0.3	0.1	0.3	4.2	1.0	1.9	0.3	10.0
	5.1 - 6.0	0.3	0.0	0.0	0.0	0.0	0.0	0.0	0.3	0.1	0.7	0.4	1.0	2.2	2.5	0.9	0.3	8.9
θ	6.1 - 7.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.6	0.0	0.1	0.3	0.3	2.7	1.5	0.4	0.4	6.5
second)	7.1 - 8.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.0	0.6	0.1	1.8	0.3	0.0	0.3	3.4
	8.1 - 9.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.3	0.3	0.0	0.3	0.0	0.0	0.4	1.5
per	9.1 - 10.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.4	0.0	0.0	0.0	0.0	0.0	0.6
ers	10.1 - 11.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.4	0.0	0.1	0.0	0.0	0.0	0.6
net	11.1 - 12.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
L)	12.1 - 13.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
ee	13.1 - 14.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Wind Speed (meters	14.1 - 15.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
۸	15.1 - 16.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	16.1 - 17.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	17.1 - 18.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	18.1 - 19.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	19.1 - 20.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	> 20.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Calm																	0.0
	Total	3.0	3.7	5.2	5.7	9.1	6.0	4.9	5.2	1.8	2.1	3.3	3.9	18.0	13.4	10.3	4.6	100.0
A٧	erage Speed	2.4	1.4	1.2	1.5	1.9	1.5	1.3	3.3	3.4	5.2	6.8	3.7	4.6	3.9	3.2	3.6	3.1


Table 7. Monthly Wind Rose Summary, Black Butte Copper Project Met Tower

					2		2	Mar	ch 20	15			-					
	Direction>>>	N	NNE	NE	ENE	Е	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	Total
	0.1 - 1.0	0.7	1.1	1.4	0.7	1.8	1.0	1.0	0.6	0.6	0.0	0.1	0.1	0.3	0.4	0.6	0.7	10.9
	1.1 - 2.0	0.7	1.7	2.5	2.8	4.4	3.6	2.9	2.3	1.0	0.4	0.3	0.6	0.6	0.7	1.1	1.1	26.4
	2.1 - 3.0	0.0	0.0	0.4	1.2	1.7	2.8	0.6	1.2	0.0	0.3	0.3	0.6	2.5	0.8	1.0	0.6	13.8
	3.1 - 4.0	0.1	0.1	0.1	0.6	1.0	0.6	0.1	8.0	0.1	0.1	0.1	0.4	3.0	1.4	8.0	0.1	9.6
	4.1 - 5.0	0.3	0.0	0.0	0.1	0.4	0.1	0.0	0.3	0.0	0.4	0.3	1.2	2.9	1.5	0.7	0.7	8.9
	5.1 - 6.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	0.4	0.1	0.6	1.5	5.0	1.1	0.6	0.8	10.3
ll $\widehat{\sigma}$	6.1 - 7.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0	1.7	0.1	0.1	0.6	1.1	3.6	0.8	0.0	0.0	8.1
second)	7.1 - 8.0	0.0	0.1	0.0	0.0	0.0	0.0	0.0	0.4	0.0	0.3	0.3	0.8	2.3	1.0	0.1	0.0	5.4
	8.1 - 9.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.1	0.3	0.7	1.5	0.4	0.3	0.0	3.6
per	9.1 - 10.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	0.4	0.8	0.0	0.0	0.0	1.5
	10.1 - 11.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.4	0.0	0.0	0.0	0.6
net	11.1 - 12.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.0	0.0	0.3
(L)	12.1 - 13.0	0.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1
)ee	13.1 - 14.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.6	0.0	0.0	0.0	0.6
Wind Speed (meters	14.1 - 15.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Ν	15.1 - 16.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
>	16.1 - 17.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	17.1 - 18.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	18.1 - 19.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	19.1 - 20.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	> 20.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Calm																	0.0
	Total	2.1	3.2	4.4	5.4	9.2	8.0	4.5	7.7	2.2	1.9	3.0	7.6	23.5	8.3	5.1	4.0	100.0
Α١	erage Speed	2.6	2.1	1.3	1.9	1.9	2.0	1.5	3.6	2.5	4.3	5.5	5.6	5.7	4.8	3.4	2.9	3.7


 Table 8.
 Quarterly Wind Rose Summary, Black Butte Copper Project Met Tower

							Fi	rst Q	uarter	201	5							
Direction>>>		N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	Total
	0.1 - 1.0	1.7	1.6	1.8	1.4	2.6	2.8	2.5	1.5	0.8	0.2	0.3	0.4	0.5	0.7	0.8	1.1	20.9
	1.1 - 2.0	0.6	1.7	2.7	2.8	4.1	3.6	2.8	1.6	0.7	0.3	0.3	0.5	1.1	1.4	1.7	0.7	26.5
	2.1 - 3.0	0.1	0.2	0.5	1.4	2.2	1.2	0.5	0.7	0.3	0.2	0.1	0.5	1.7	1.4	1.5	0.7	13.3
	3.1 - 4.0	0.3	0.1	0.0	0.3	0.9	0.4	0.0	0.5	0.3	0.0	0.0	0.4	2.1	2.2	1.4	0.2	9.1
	4.1 - 5.0	0.1	0.0	0.0	0.0	0.2	0.1	0.0	0.6	0.0	0.2	0.2	0.7	2.8	1.4	1.2	0.4	7.9
	5.1 - 6.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.3	0.3	0.3	0.3	0.8	3.0	1.7	0.5	0.4	7.7
Q	6.1 - 7.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.9	0.0	0.1	0.3	0.5	2.8	1.3	0.3	0.2	6.5
second)	7.1 - 8.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.0	0.1	0.3	0.5	1.9	0.5	0.2	0.1	3.8
se	8.1 - 9.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.2	0.2	0.8	0.3	0.2	0.1	2.1
per	9.1 - 10.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.2	0.5	0.1	0.0	0.0	1.1
	10.1 - 11.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.3	0.0	0.0	0.0	0.5
Speed (meters	11.1 - 12.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.0	0.0	0.2
d (r	12.1 - 13.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
эес	13.1 - 14.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.0	0.0	0.0	0.2
S, S	14.1 - 15.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Wind	15.1 - 16.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
>	16.1 - 17.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	17.1 - 18.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	18.1 - 19.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	19.1 - 20.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	> 20.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Calm																	0.0
Total		3.1	3.8	5.1	5.9	10.0	8.2	5.8	6.3	2.5	1.6	2.5	4.9	17.8	11.0	7.8	3.9	100.0
Average Speed		1.8	1.5	1.3	1.7	1.8	1.5	1.2	3.0	2.4	4.2	5.3	4.7	5.3	4.2	3.3	2.9	3.1




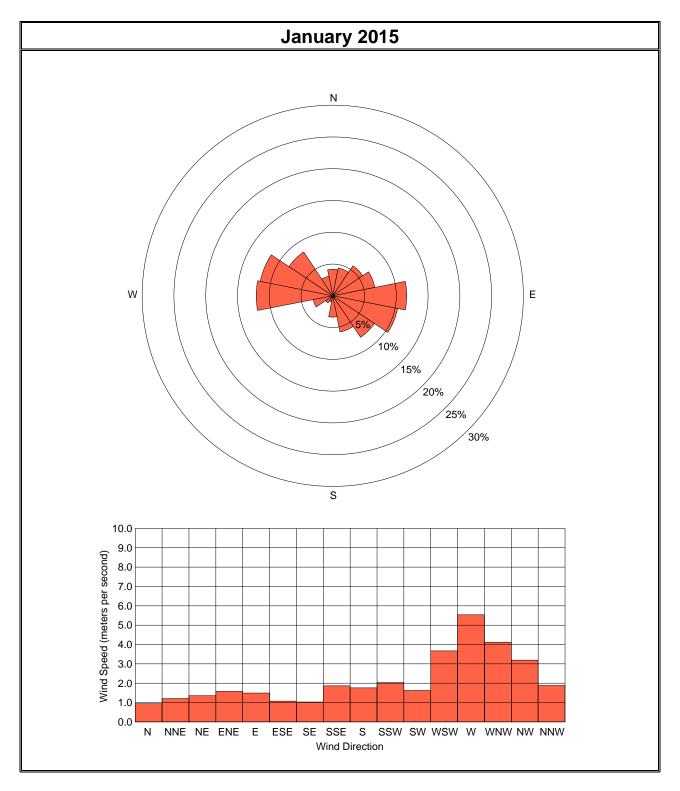



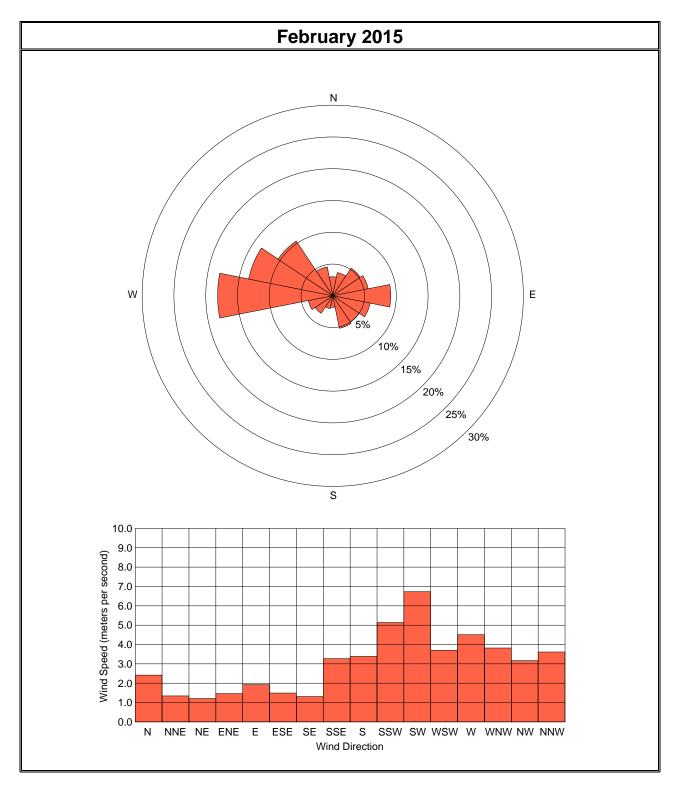



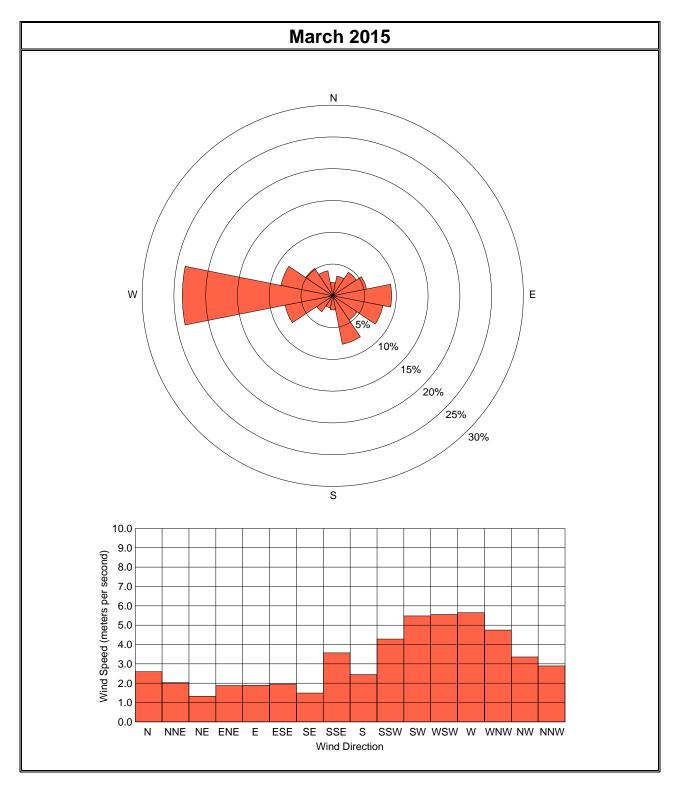

19



